




by


# JH INDUSTRIES, INC.

## Dockboards and Railboards

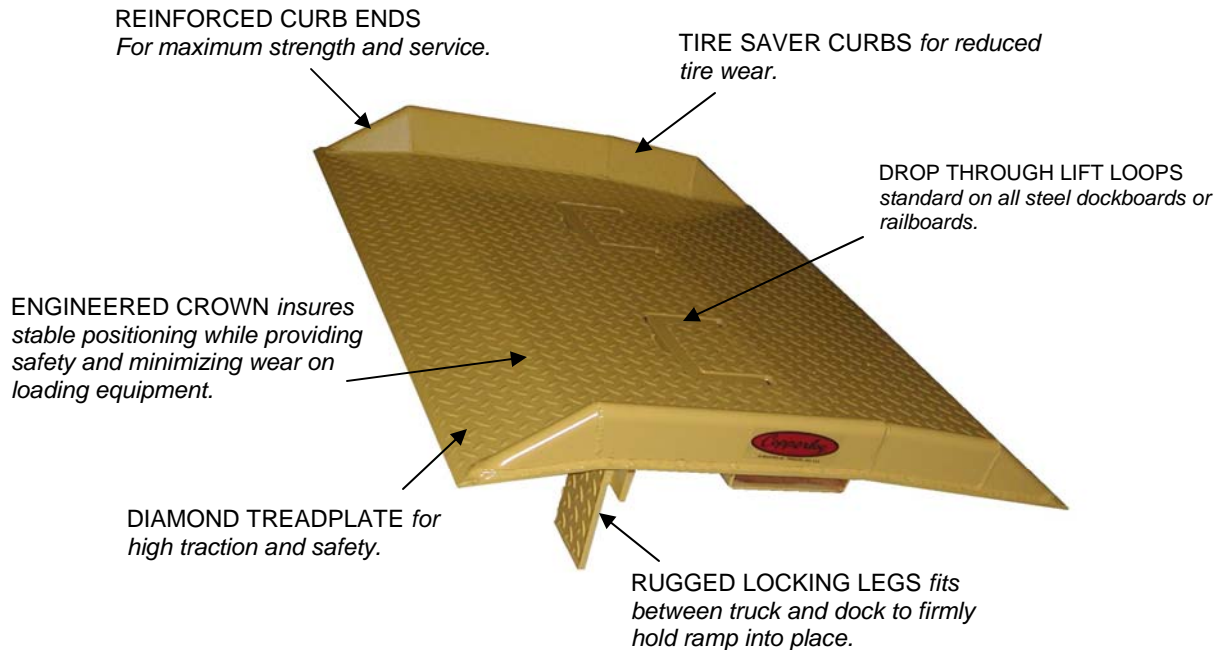


### Aluminum Dockboard with Welded Curbs

- Fully welded aluminum curbs for the highest strength.
- Tough aluminum treadplate for lightweight, corrosion-free surface.
- Premium dockboard.
- Mid to rough duty cycles
- Lightweight maneuverability.

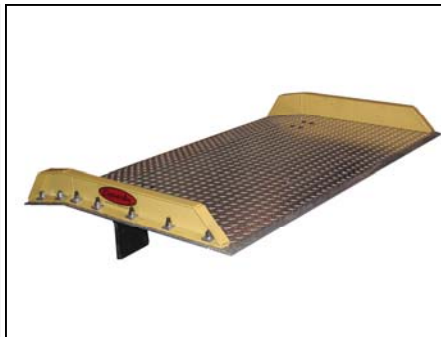

### Aluminum Dockboard with Bolt-On Steel Curbs

- Structural steel curbs bolted on 6" centers.
- Tough aluminum treadplate deck for lightweight, high traction, corrosion free surface.
- Low cost alternative.
- Light to mid duty cycles.
- Lightweight maneuverability.

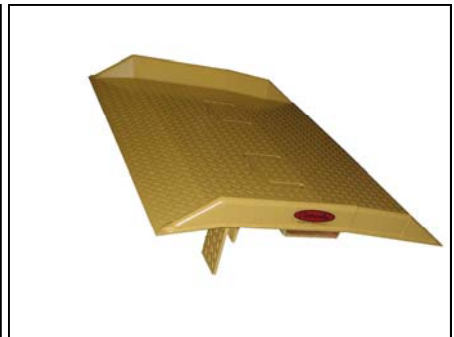

### Steel Dockboard with Welded Curbs

- Fully welded all steel curbs.
- Heavy steel treadplate deck for high durability and extended service life.
- Most durable for the greatest value.
- Engineered for the toughest duty cycles.
- Several lifting devices available.
- Drop through lift loops standard.
- Lift chains also available.



### Dockplates

- Available in steel or aluminum in many gauges.
- Used in lighter capacity applications where low height differences exist and safety curbs are not necessary.
- Rugged 1/2" thick steel locking legs attached with high strength, vibration proof fasteners.
- Knuckle saver strap handle.



### Ramp-Dockboard Combination

- Available in steel or aluminum.
- Used when a large height difference exists or low clearance equipment creates an excessively long ramp.
- Dockboard section can be used independently.

## LIFTING DEVICES

### LIFT LOOPS

- Come standard on truck dockboards and railboards.
- Spaced on 24" centers.
- Located 24" from approach end of dockboard to accommodate different fork sizes.

### MAGNE-LIFT

- Sleeves loop into slots in the deck of the dockboard and are chained together for storage convenience.
- Assures secure handling.
- Available on all dockboards and railboards.

### LIFT CHAINS

- Available in 1 or 2 piece.
- Center hooks disconnect during use.
- Secured to the curb.
- Available on all dockboards and railboards.



### Railboards

- Rugged all welded steel construction.
- Heavy understructure for safety and durability.
- Drop through lift loops or lift chains standard.
- Available in rectangular or flared.
- Heavy understructure spans the gap and locks ramp into place with 8" automatic ring adjustments. (14" max adjustment)
- Available in steel or aluminum.

## DOCKBOARD ACCESSORIES

### LOCKING PINS

- Locks span manually.
- Used in conjunction with fixed locking legs.
- Locks dockboard in place for uneven dock conditions.
- Allows for 6" of adjustment.
- Greater adjustment available if necessary.

### CONVERTERS

- Locks dockboard in place when an uneven dock condition exists or with a park-out situation.
- Available on welded aluminum dockboards.



## Steel Dockboard Specifications (Welded Steel Curbs)

**15,000# Gross Capacity**

**20,000# Gross Capacity**

Width	Length	Height Diff.*	Weight	Model Number	Width	Length	Height Diff.*	Weight	Model Number
60"	36"	+5"	375	STR15-60-36	60"	36"	+5"	465	STR20-60-36
	42"	+6"	465	STR15-60-42		42"	+6"	575	STR20-60-42
	48"	+7 ½"	515	STR15-60-48		48"	+7 ½"	635	STR20-60-48
	54"	+8 ½"	600	STR15-60-54		54"	+8 ½"	705	STR20-60-54
	60"	+9 ½"	650	STR15-60-60		60"	+9 ½"	770	STR20-60-60
	66"	+10 ½"	700	STR15-60-66		66"	+10 ½"	835	STR20-60-66
	72"	+12"	750	STR15-60-72		72"	+12"	900	STR20-60-72
	78"	+13"	800	STR15-60-78		78"	+13"	1000	STR20-60-78
	84"	+14"	860	STR15-60-84		84"	+14"	1060	STR20-60-84
	90"	+15"	945	STR15-60-90		90"	+15"	1130	STR20-60-90
96"	+16"	1000	STR15-60-96	96"	+16"	1200	STR20-60-96		
72"	36"	+5"	440	STR15-72-36	72"	36"	+5"	540	STR20-72-36
	42"	+6"	545	STR15-72-42		42"	+6"	670	STR20-72-42
	48"	+7 ½"	600	STR15-72-48		48"	+7 ½"	800	STR20-72-48
	54"	+8 ½"	690	STR15-72-54		54"	+8 ½"	825	STR20-72-54
	60"	+9 ½"	750	STR15-72-60		60"	+9 ½"	900	STR20-72-60
	66"	+10 ½"	805	STR15-72-66		66"	+10 ½"	975	STR20-72-66
	72"	+12"	870	STR15-72-72		72"	+12"	1050	STR20-72-72
	78"	+13"	930	STR15-72-78		78"	+13"	1160	STR20-72-78
	84"	+14"	995	STR15-72-84		84"	+14"	1240	STR20-72-84
	90"	+15"	1,090	STR15-72-90		90"	+15"	1320	STR20-72-90
96"	+16"	1,150	STR15-72-96	96"	+16"	1395	STR20-72-96		
84"	36"	+5"	500	STR15-84-36	84"	36"	+5"	615	STR20-84-36
	42"	+6"	625	STR15-84-42		42"	+6"	765	STR20-84-42
	48"	+7 ½"	670	STR15-84-48		48"	+7 ½"	850	STR20-84-48
	54"	+8 ½"	780	STR15-84-54		54"	+8 ½"	945	STR20-84-54
	60"	+9 ½"	850	STR15-84-60		60"	+9 ½"	1030	STR20-84-60
	66"	+10 ½"	920	STR15-84-66		66"	+10 ½"	1120	STR20-84-66
	72"	+12"	990	STR15-84-72		72"	+12"	1200	STR20-84-72

\*Height differential based on forklift use.

### Standard Features:

- 11" Lip (optional 14" Lip)
- 10", 14" and 18" Locking Legs
- 5 ½" Curbs
- Fold down Lifting Loops (Chains can be supplied)



## Aluminum Dockboard w/ Bolt-On Steel Curbs Specification

### 10,000# Gross Capacity

### 15,000# Gross Capacity

10,000# Gross Capacity					15,000# Gross Capacity					
Width	Length	Height Diff.*	Weight	Model Number	Width	Length	Height Diff.*	Weight	Model Number	
54"	36"	+5"	118	ABC10-54-36	54"	36"	+5"	138	ABC15-54-36	
	42"	+6"	134	ABC10-54-42		42"	+6"	162	ABC15-54-42	
	48"	+7 ½"	151	ABC10-54-48		48"	+7 ½"	185	ABC15-54-48	
	54"	+8 ½"	172	ABC10-54-54		54"	+8 ½"	210	ABC15-54-54	
	60"	+9 ½"	190	ABC10-54-60		60"	+9 ½"	230	ABC15-54-60	
60"	36"	+5"	128	ABC10-60-36	60"	36"	+5"	154	ABC15-60-36	
	42"	+6"	147	ABC10-60-42		42"	+6"	178	ABC15-60-42	
	48"	+7 ½"	164	ABC10-60-48		48"	+7 ½"	200	ABC15-60-48	
	54"	+8 ½"	182	ABC10-60-54		54"	+8 ½"	225	ABC15-60-54	
	60"	+9 ½"	202	ABC10-60-60		60"	+9 ½"	248	ABC15-60-60	
	66"	+10 ½"	222	ABC10-60-66		66"	+10 ½"	265	ABC15-60-66	
66"	72"	+12"	241	ABC10-60-72	66"	72"	+12"	297	ABC15-60-72	
	36"	+5"	132	ABC10-66-36		66"	36"	+5"	165	ABC15-66-36
	48"	+7 ½"	175	ABC10-66-48			48"	+7 ½"	217	ABC15-66-48
60"	+9 ½"	215	ABC10-66-60	60"	+9 ½"		267	ABC15-66-60		
72"	36"	+5"	145	ABC10-72-36	72"	36"	+5"	178	ABC15-72-36	
	48"	+7 ½"	187	ABC10-72-48		48"	+7 ½"	231	ABC15-72-48	
	60"	+9 ½"	230	ABC10-72-60		60"	+9 ½"	285	ABC15-72-60	

\*Height differential based on forklift use.

### Standard Features:

- 11" Lip (Optional 14" Lip)
- 4" Steel Curbs
- 9" and 13" Locking Legs
- Lift Chain Option



## Aluminum Dockboard Specifications (Welded Aluminum Curbs)

### 10,000# Gross Capacity

Width	Length	Height Diff.*	Weight	Model Number
54"	30"	+4"	99	ATR10-54-30
	36"	+5"	114	ATR10-54-36
	42"	+6"	130	ATR10-54-42
	48"	+7 ½"	158	ATR10-54-48
	54"	+8 ½"	174	ATR10-54-54
	60"	+9 ½"	191	ATR10-54-60
	66"	+10 ½"	208	ATR10-54-66
	72"	+12"	225	ATR10-54-72
	78"	+13"	264	ATR10-54-78
	84"	+14"	285	ATR10-54-84
60"	30"	+4"	120	ATR10-60-30
	36"	+5"	138	ATR10-60-36
	42"	+6"	157	ATR10-60-42
	48"	+7 ½"	189	ATR10-60-48
	54"	+8 ½"	209	ATR10-60-54
	60"	+9 ½"	229	ATR10-60-60
	66"	+10 ½"	249	ATR10-60-66
	72"	+12"	271	ATR10-60-72
	78"	+13"	313	ATR10-60-78
	84"	+14"	338	ATR10-60-84
72"	30"	+4"	141	ATR10-72-30
	60"	+9 ½"	266	ATR10-72-60
84"	30"	+4"	177	ATR10-84-30
	60"	+9 ½"	332	ATR10-84-60

### 12,000# Gross Capacity

Width	Length	Height Diff.*	Weight	Model Number
54"	30"	+4"	114	ATR12-54-30
	36"	+5"	133	ATR12-54-36
	42"	+6"	151	ATR12-54-42
	48"	+7 ½"	173	ATR12-54-48
	54"	+8 ½"	191	ATR12-54-54
	60"	+9 ½"	210	ATR12-54-60
	66"	+10 ½"	229	ATR12-54-66
	72"	+12"	269	ATR12-54-72
	78"	+13"	289	ATR12-54-78
	84"	+14"	312	ATR12-54-84
60"	30"	+4"	125	ATR12-60-30
	36"	+5"	144	ATR12-60-36
	42"	+6"	165	ATR12-60-42
	48"	+7 ½"	189	ATR12-60-48
	54"	+8 ½"	208	ATR12-60-54
	60"	+9 ½"	229	ATR12-60-60
	66"	+10 ½"	249	ATR12-60-66
	72"	+12"	291	ATR12-60-72
	78"	+13"	313	ATR12-60-78
	84"	+14"	338	ATR12-60-84
72"	30"	+4"	159	ATR12-72-30
	60"	+9 ½"	292	ATR12-72-60
84"	30"	+4"	198	ATR12-84-30
	48"	+7 ½"	297	ATR12-84-48
	60"	+9 ½"	361	ATR12-84-60

### 15,000# Gross Capacity

Width	Length	Height Diff.*	Weight	Model Number
60"	30"	+4"	125	ATR15-60-30
	36"	+5"	144	ATR15-60-36
	42"	+6"	165	ATR15-60-42
	48"	+7 ½"	189	ATR15-60-48
	54"	+8 ½"	224	ATR15-60-54
	60"	+9 ½"	247	ATR15-60-60
	66"	+10 ½"	270	ATR15-60-66
	72"	+12"	291	ATR15-60-72
72"	30"	+4"	159	ATR15-72-30
	48"	+7 ½"	240	ATR15-72-48
	60"	+9 ½"	309	ATR15-72-60

\*Height differential based on forklift use.

#### Standard Features:

- 11" Lip (Optional 14" Lip)
- 4" Aluminum Curbs
- 9" and 13" Locking Legs