



WARNING

Place barriers on driveway and dock floor to indicate service work being performed. This Portable Maintenance Prop (PMP) is to be used along with a secondary support specified by the Dock Leveler OEM. Secure PMP as illustrated in the Operating Instructions.

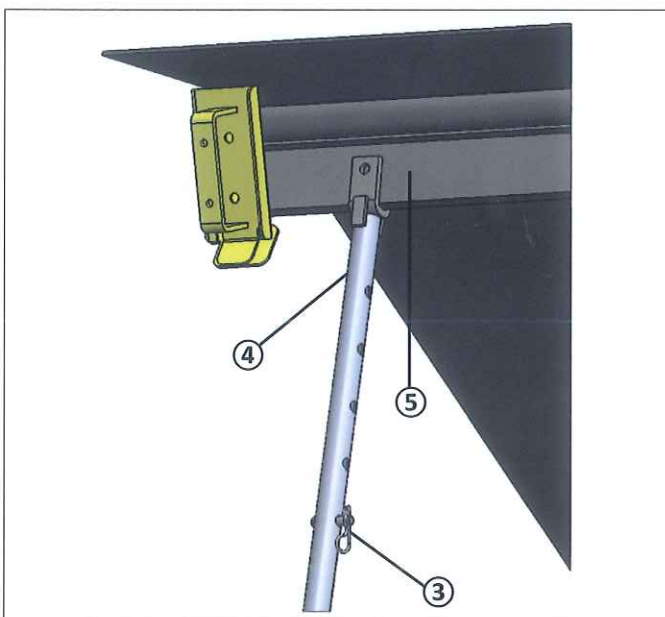

OPERATING INSTRUCTIONS

1. Install Pit Bracket (if no suitable Dock Leveler Subframe cross member is present). Secure with Concrete Anchor (3/8" x 3") or weld to curb steel.
2. Position PMP onto Pit Bracket then insert Lock Pin to secure PMP to Pit Bracket.
3. Adjust PMP to proper height and insert Clevis Pin and Cotter Pin to secure.
4. Position PMP onto Dock Leveler Deck Cross Member or Lip Shaft at appropriate location.
5. Secure position by applying a Locking Pliers or Clamp to one or both sides.
6. Position the Lip Support Bracket with Tab Surface behind Lip Plate Edge.

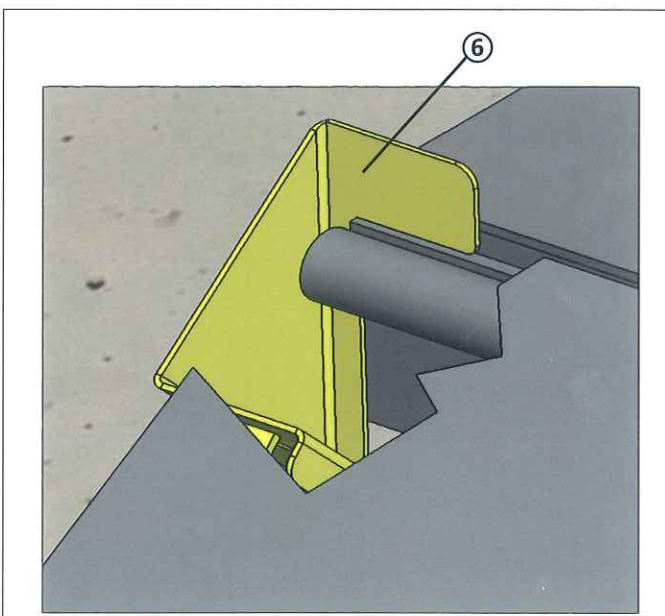


**MULTI-FAB
PRODUCTS**

1.262.502.1707



Call for additional placards.

INST159

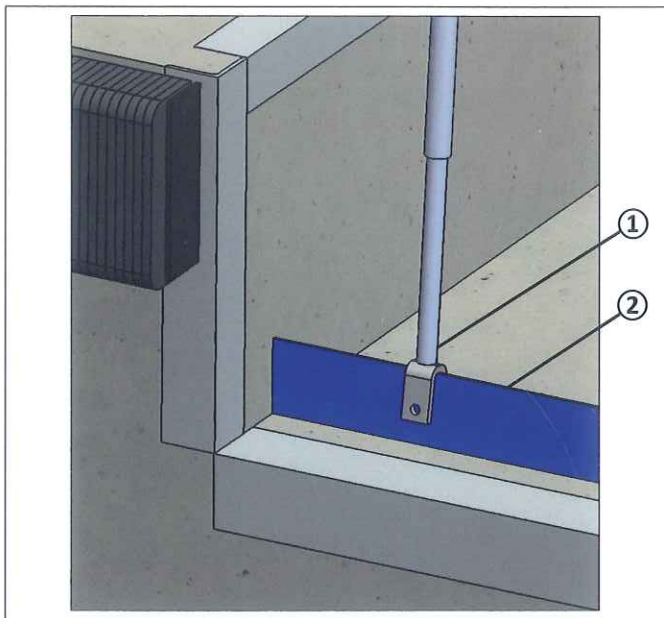

WARNING

Place barriers on driveway and dock floor to indicate service work being performed. This Portable Maintenance Prop (PMP) is to be used along with a secondary support specified by the Dock Leveler OEM. Secure PMP as illustrated in the Operating Instructions.

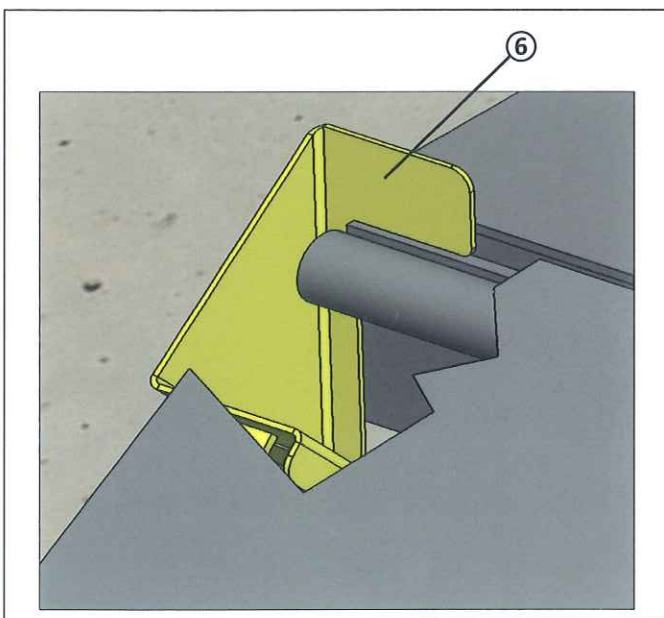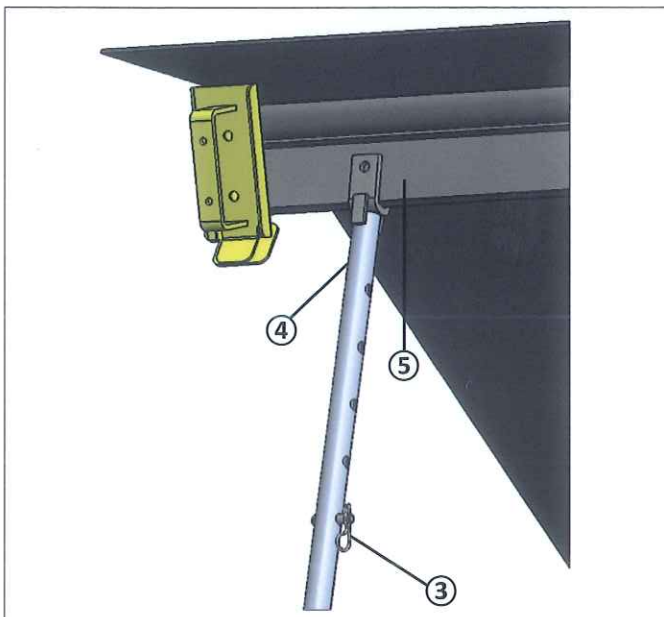

OPERATING INSTRUCTIONS

1. Position PMP onto Dock Leveler Subframe cross member at appropriate location.
2. Secure PMP position by applying a Locking Pliers or Clamp to one or both sides.
3. Adjust PMP to proper height and insert Clevis Pin and Cotter Pin to secure.
4. Position PMP onto Dock Leveler Deck Cross Member or Lip Shaft at appropriate location.
5. Secure position by applying a Locking Pliers or Clamp to one or both sides.
6. Position the Lip Support Bracket with Tab Surface behind Lip Plate Edge.



**MULTI-FAB
PRODUCTS**

1.262.502.1707

Call for additional placards.

INST159