




by


JH INDUSTRIES, INC.

Dockboards and Railboards

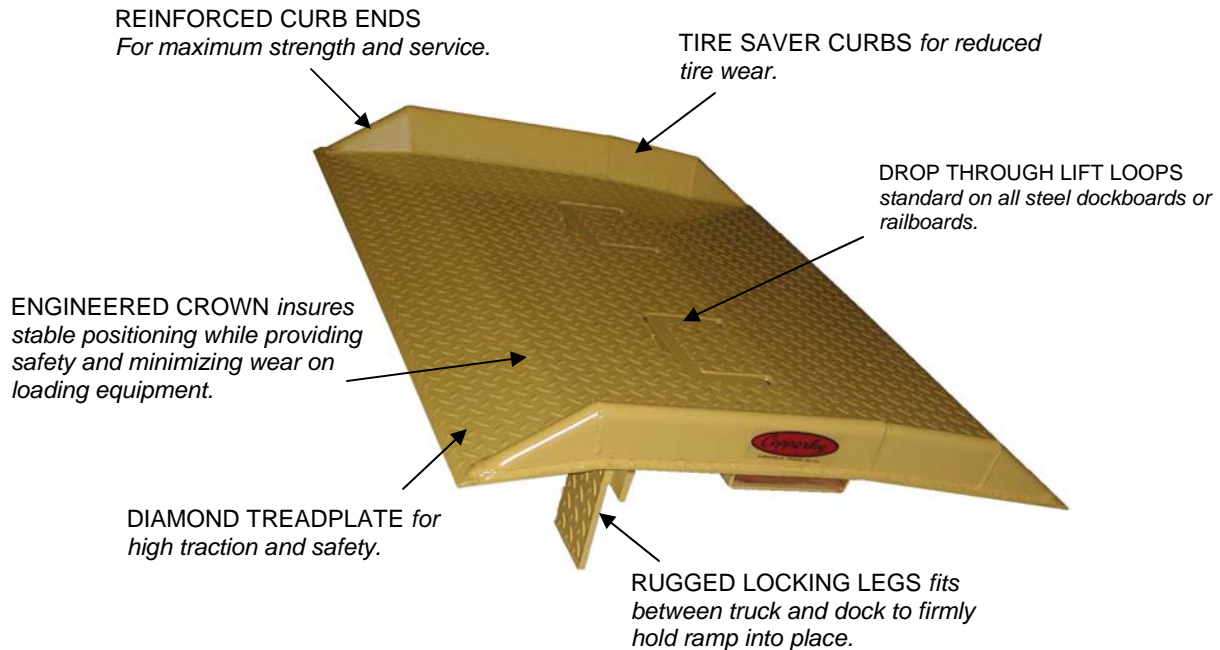


Aluminum Dockboard with Welded Curbs

- Fully welded aluminum curbs for the highest strength.
- Tough aluminum treadplate for lightweight, corrosion-free surface.
- Premium dockboard.
- Mid to rough duty cycles
- Lightweight maneuverability.

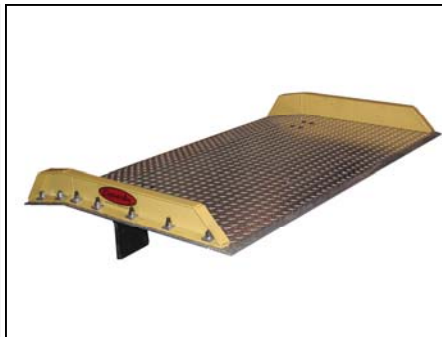

Aluminum Dockboard with Bolt-On Steel Curbs

- Structural steel curbs bolted on 6" centers.
- Tough aluminum treadplate deck for lightweight, high traction, corrosion free surface.
- Low cost alternative.
- Light to mid duty cycles.
- Lightweight maneuverability.

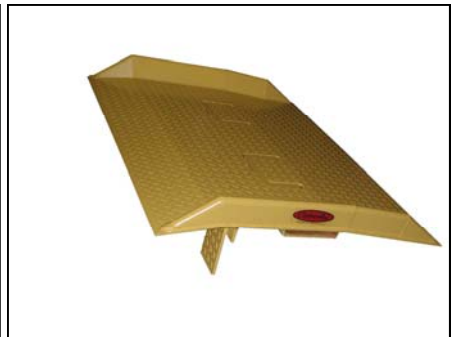

Steel Dockboard with Welded Curbs

- Fully welded all steel curbs.
- Heavy steel treadplate deck for high durability and extended service life.
- Most durable for the greatest value.
- Engineered for the toughest duty cycles.
- Several lifting devices available.
- Drop through lift loops standard.
- Lift chains also available.



Dockplates

- Available in steel or aluminum in many gauges.
- Used in lighter capacity applications where low height differences exist and safety curbs are not necessary.
- Rugged 1/2" thick steel locking legs attached with high strength, vibration proof fasteners.
- Knuckle saver strap handle.



Ramp-Dockboard Combination

- Available in steel or aluminum.
- Used when a large height difference exists or low clearance equipment creates an excessively long ramp.
- Dockboard section can be used independently.

LIFTING DEVICES

LIFT LOOPS

- Come standard on truck dockboards and railboards.
- Spaced on 24" centers.
- Located 24" from approach end of dockboard to accommodate different fork sizes.

MAGNE-LIFT

- Sleeves loop into slots in the deck of the dockboard and are chained together for storage convenience.
- Assures secure handling.
- Available on all dockboards and railboards.

LIFT CHAINS

- Available in 1 or 2 piece.
- Center hooks disconnect during use.
- Secured to the curb.
- Available on all dockboards and railboards.



Railboards

- Rugged all welded steel construction.
- Heavy understructure for safety and durability.
- Drop through lift loops or lift chains standard.
- Available in rectangular or flared.
- Heavy understructure spans the gap and locks ramp into place with 8" automatic ring adjustments. (14" max adjustment)
- Available in steel or aluminum.

DOCKBOARD ACCESSORIES

LOCKING PINS

- Locks span manually.
- Used in conjunction with fixed locking legs.
- Locks dockboard in place for uneven dock conditions.
- Allows for 6" of adjustment.
- Greater adjustment available if necessary.

CONVERTERS

- Locks dockboard in place when an uneven dock condition exists or with a park-out situation.
- Available on welded aluminum dockboards.



Dockplate Specifications (No Curbs)

Steel Dockplates

Width	Length	Model Number	Capacity	Weight	Height Diff.
60"	24"	SP60-24	14,000	280	+3"
	30"	SP60-30	12,500	333	+4"
	36"	SP60-36	11,000	387	+5"
	42"	SP60-42	9,500	440	+6"
	48"	SP60-48	8,500	494	+7 ½"
	54"	SP60-54	7,500	554	+8 ½"
	60"	SP60-60	6,500	607	+9 ½"
	66"	SP60-66	6,000	661	+10 ½"
	72"	SP60-72	4,500	715	+12"
72"	24"	SP72-24	17,000	332	+3"
	30"	SP72-30	15,000	407	+4"
	36"	SP72-36	13,000	461	+5"
	42"	SP72-42	11,000	525	+6"
	48"	SP72-48	10,000	590	+7 ½"
	54"	SP72-54	9,000	660	+8 ½"
	60"	SP72-60	8,000	725	+9 ½"
	66"	SP72-66	7,000	789	+10 ½"
	72"	SP72-72	6,000	853	+12"

Standard Features:

- All models constructed of ½" steel tread plate
- One piece lifting chain
- 11" Lip (Optional 14" lip)



Dockplate Specifications (No Curbs)

3/8" Aluminum Dockplates

Model Number	Width	Length	Capacity	Weight	Height Diff.	Leg Size
LP36-24	36"	24"	3,700	56	3"	9"
LP36-30	36"	30"	2,800	64	4"	9"
LP36-36	36"	36"	2,300	72	5"	9"
LP36-48	36"	48"	1,700	89	7"	9"
LP48-24	36"	24"	4,700	67	3"	9"
LP48-30	48"	30"	3,800	78	4"	9"
LP48-36	48"	36"	3,100	89	5"	9"
LP48-42	48"	42"	2,600	100	6"	9"
LP48-48	48"	48"	2,200	112	7"	9"
LP48-54	48"	54"	1,700	135	8"	13"
LP48-60	48"	60"	1,200	146	9 1/2"	13"
LP48-66	48"	66"	900	157	10 1/2"	13"
LP48-72	48"	72"	700	168	11 1/2"	13"
LP60-24	48"	24"	5,900	78	3"	9"
LP60-30	60"	30"	4,700	92	4"	9"
LP60-36	60"	36"	3,800	106	5"	9"
LP60-42	60"	42"	3,200	120	6"	9"
LP60-48	60"	48"	2,700	134	7"	9"
LP60-54	60"	54"	2,100	160	8"	13"
LP60-60	60"	60"	1,500	174	9 1/2"	13"
LP60-66	60"	66"	1,100	188	10 1/2"	13"
LP60-72	60"	72"	850	202	11 1/2"	13"

Standard Features:

- Heavy duty strap handles
- 11" Lip (Optional 14" lip)



Dockplate Specifications (No Curbs)

1/2" Aluminum Dockplates

Model Number	Width	Length	Capacity	Weight	Height Diff.	Leg Size
TLP48-24	36"	24"	8,500	80	3"	9"
TLP48-30	48"	30"	6,800	95	4"	9"
TLP48-36	48"	36"	5,500	110	5"	9"
TLP48-42	48"	42"	4,600	125	6"	9"
TLP48-48	48"	48"	4,000	139	7"	9"
TLP48-54	48"	54"	3,500	165	8"	13"
TLP48-60	48"	60"	3,100	180	9 1/2"	13"
TLP48-66	48"	66"	2,100	195	10 1/2"	13"
TLP48-72	48"	72"	1,600	209	11 1/2"	13"
TLP60-24	48"	24"	10,500	95	3"	9"
TLP60-30	60"	30"	8,500	110	4"	9"
TLP60-36	60"	36"	6,800	132	5"	9"
TLP60-42	60"	42"	5,800	153	6"	9"
TLP60-48	60"	48"	5,000	168	7"	9"
TLP60-54	60"	54"	4,400	198	8"	13"
TLP60-60	60"	60"	3,800	217	9 1/2"	13"
TLP60-66	60"	66"	2,600	235	10 1/2"	13"
TLP60-72	60"	72"	2,000	253	11 1/2"	13"
TLP72-24	72"	24"	12,500	110	3"	9"
TLP72-30	72"	30"	10,000	132	4"	9"
TLP72-36	72"	36"	8,200	153	5"	9"
TLP72-42	72"	42"	6,800	175	6"	9"
TLP72-48	72"	48"	6,000	197	7"	9"
TLP72-54	72"	54"	5,200	231	8"	13"
TLP72-60	72"	60"	4,600	253	9 1/2"	13"

Standard Features:

- Heavy duty strap handles
- 11" Lip (Optional 14" lip)